
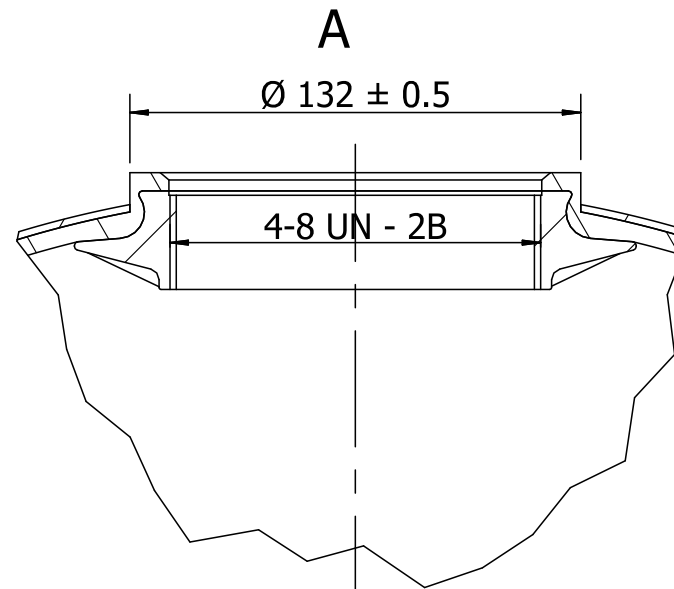


Name	Height	Vol	Weight
1665-4T	1665 mm	187.7 L	

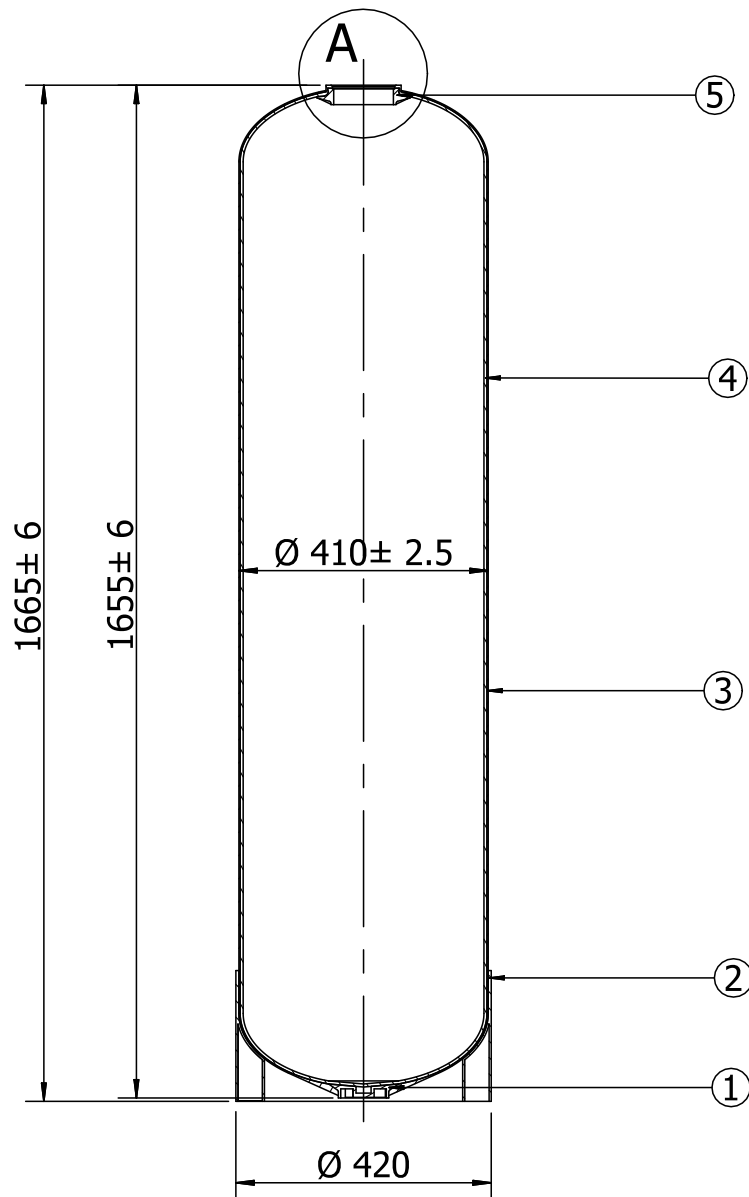

NOTES:

1. Inner shell - Polyethylene (PE) seamless one-piece tank liner
2. Outer shell - Continuous strands of fiber-glass with high strength epoxy resin
3. Bottom base - FRP reinforced tripod base
4. Opening - 4 inch thread opening
5. Tanks meet all applicable specification of NSF/ANSI 044 standard
6. Operating Specifications:
 - Maximum Working Pressure : 150 PSI (1.0MPa)
 - Temperature :149 C (312-120 F)
 - Maximum Vacuum:127mm Hg(5"Hg)
7. Liner inspection
 - No more than 20 internal 、 external blemishes、 burnt debris
 - No internal 、 external blemishes、 burnt debris larger than 5 *5 mm
8. Surface finish
9. Surface to be free of resin, glass,nicks,barbed filament
10. Tank to be bonded to base
11. The base to be level correction
12. Top and bottom opening to be parallel, top opening to be parallel with the base

5	4"-8UN	1	PPO、MODIFIED PP	
4	LINER	1	PE	
3	OUTER SHEEL	1	FRP	
2	BASE	1	MODIFIED PP	
1	BOTTOM PROTECTION	1	ABS	
NO.	NAME	COUNT	MATERIAL	REMARK
Subsidiary Column				

Subsidiary Column

				CANATURE HUAYU ENVIRONMENTAL PRODUCTS CO.,LTD		
标记	数量	分区	更改文件号	签名	日期	
设计			标准化			
审核						
工艺			批准			

CANATURE HUAYU
ENVIRONMENTAL
PRODUCTS CO.,LTD

1665-4T