

	Weight
2162H-4T4B 1910 mm 326l	-

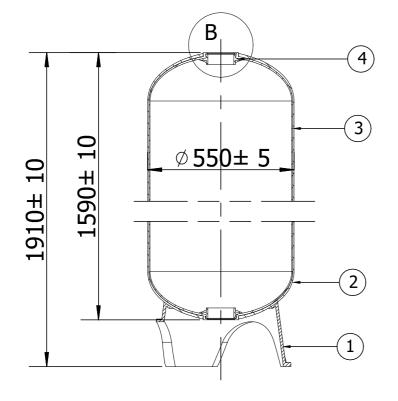



В

- 1. Inner shell Polyethylene (PE) seamless one-piece tank liner
- Outer shell Continuous strands of fiber-glass with high strength epoxy resin
 Bottom base FRP reinforced tripod base
- 4. Opening 4 inch thread opening
- 5. Tanks meet all applicable specification of NSF/ANSI 044 standard 6. Operating Specifications: Maximum Working Pressure : 150 PSI (1.0MPA) Temperature :1-49 C (34-120 F)

Maximum Vacuum:127mm Hg(5"Hg)

7. Liner inspection

No more than 20 internal cexternal blemishes burnt debris

No internal 、external blemishes、burnt debris larger than 5 *5 mm

- 8. Surface finish
- 9. Surface to be free of resin, glass, nicks, barbed filament
- 10. Tank to be bonded to base
- 11. The base to be level correction
- 12. Top and bottom opening to be parallel,top opening to be parallel with the base

4	4"-8UN	2	PPO		
3	Linner	1	PE		
2	OuterShell	1	FRP		
1	Base	1	SMC		
NO.	NAME	COUNT	MATERIAL	REMARK	
Subsidiary Column					

CANATURE HUAYU **ENVIRONMENTAL PRODUCTS** CO.,LTD 2162H-4T4B 本图尺寸均以mm计,图中尺寸请勿量即

